

12/7/20

7i77GAND
(option 2) (DRVO)

TB5

1	ENAO
2	ENAO+
3	GND
4	AOUTO

Pin	Name
1	+10V 3mA OUT
2	SIGNAL GND
3	-10V 3mA OUT
4	+REF IN
5	-REF IN
6	ENCODER A IN
7	ENCODER A IN
8	CURRENT MONITOR
9	INHIBIT / ENABLE
10	+V HALL 30mA OUT
11	GND
12	HALL 1
13	HALL 2
14	HALL 3
15	VEL MONITOR OUT
16	FAULT OUT


EN/Inhibit SW de padat (option 1)

TB3

1	QAO
2	/QAO
3	GND
4	QBO
5	/QBO
6	+5V
7	x
8	x

CA-LCS-W4-NC
US Digital Connector

Brown	1 GND
	2 x
Blue	3 A channel
Orange	4 +VDC power
Yellow	5 B channel

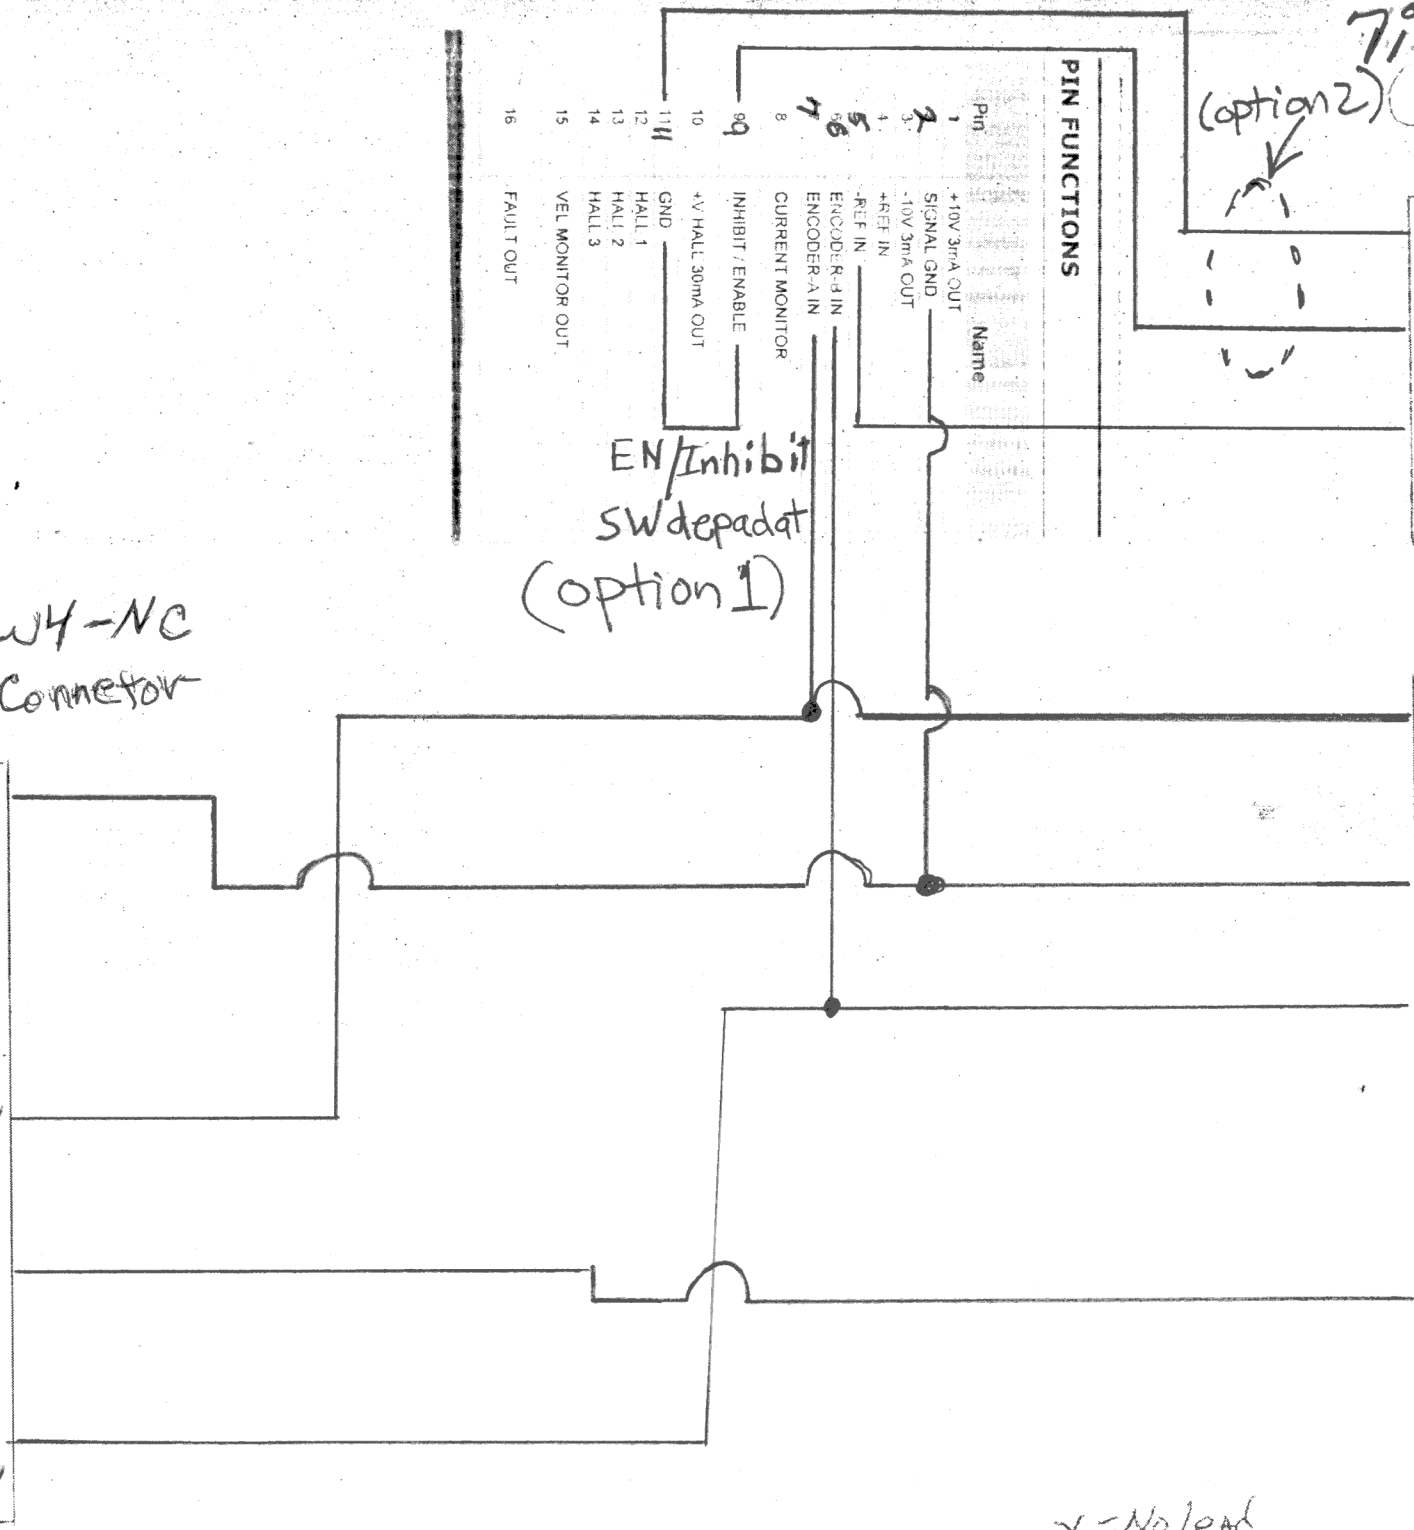

x = No lead