
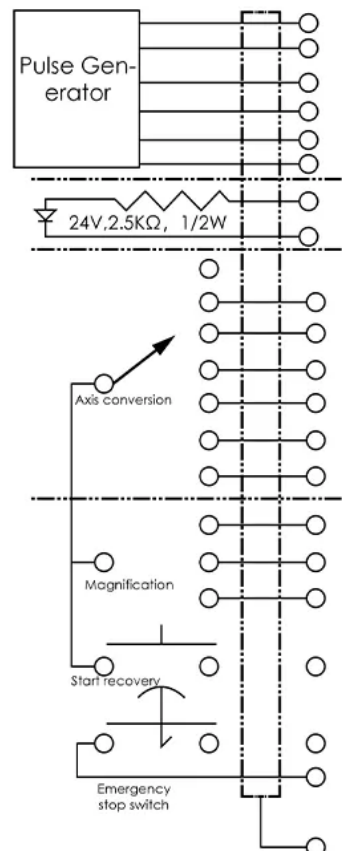
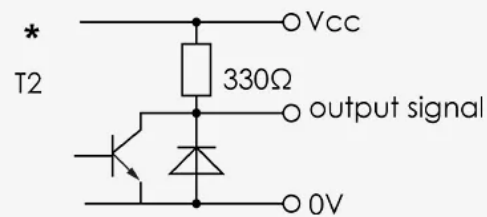


Buy Now

Output circuit	Open collector output	Voltage output	Complementary output
voltage Vcc	5-26	5-26	5±0.25 5-26
Current consumption	≤80mA	≤80mA	≤80mA
Load current	40mA	40mA	40mA
Output H high	Minimum Vcc*70%	Minimum Vcc-2.5V	Minimum Vcc-1.5V
Output low level	0.4V maximum	0.4V maximum	0.8V maximum
Rise Time Tr	MAX 1us	MAX 1us	MAX 1us
Fall time Tf	MAX 1us	MAX 1us	MAX 1us
Highest frequency response	10kHz	10kHz	10kHz

Mechanical properties			
Maximum speed per minute r/min	Operating temperature	Storage temperature	Protection level
600	-25~70℃	-25~85℃	IP50

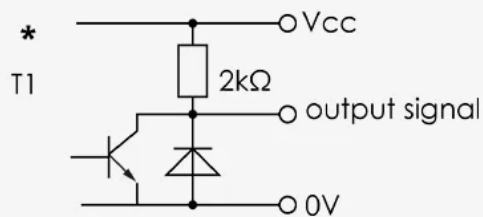

Color	Signal	Function
Red	+5v	Pulse Generator
Black	0v	
Green	A	
White	B	
Purple	/A	Long drive output
Purple/Black	/B	
Black/Green	+	Power supply
Black/White	-	
Color	OFF	Ax is Option
Yellow	X	
Black/Yellow	Y	
Grown	Z	
Black/Grown	4	
Pink	5	
Pink/Black	6	
Grey	x1	
Black/Grey	x10	
Orange	x100	Control switch
Black/Orange	COM	
Light blue	C	Emergency
Black/Light blue	CN	